

Abrasive products for floor sanding



Genuine STARCKE. Since 1829.



EXCELLENCE IS NOT A MATTER OF CHANCE

Abrasives from STARCKE are typical “Made in Germany” quality. For customers and partners world-wide, this means they can rely on a top supplier for professional abrasives in industry, manufacturing and trade. We offer efficient solutions to ensure perfect results in all lines of industry and areas of application.

The STARCKE organization is an independent, medium-sized, fourth-generation and family-run business that ranks among the leading suppliers of quality abrasives. For more than a century, STARCKE

abrasive cloths and papers have been used to give the required finish to a wide range of different products, ensuring top-quality results.

Quality is one of our top priorities and is continually reviewed. This involves inspecting each batch and documenting the results. An ISO 9001 certified organization, STARCKE offers innovative products for sanding applications in the flooring industry.

OUR EXPERTISE IN PARQUET FINISHING

We are the specialists for perfect surfaces in belt, disc, and edge sanding applications.

Your advantages:

- The right abrasive tool for every application
- A comprehensive range of products
- Consistent product quality “Made in Germany”
- Swift and dependable delivery
- Customized consultation by our applications engineers, field and office staff

EXPERTISE IN PARQUET APPLICATIONS

Your partner for all sanding applications in the flooring industry



1. Abrasives for belt sanders



2. Abrasives for single / multi-disc sanders



3. Abrasives for edge sanders

BELT SANDERS



ARTICLE NO. 341 X

| | |
|----------------------|--|
| Backing | Heavy X-weight cotton fabric |
| Bonding | Resin over resin |
| Grain type | Zirconia |
| Grits | 24, 36, 40, 60, 80, 100, 120 |
| Dimensions | 200 x 750 mm, 250 x 750 mm |
| Areas of application | New flooring / old floor refinishing |
| Suitable for | Hardwood and softwood |
| Benefits | <ul style="list-style-type: none"> – Long service life – Extremely high abrasive performance |



ARTICLE NO. 341 XP

| | |
|----------------------|--|
| Backing | Heavy X-weight cotton/polyester fabric blend |
| Bonding | Resin over resin |
| Grain type | Zirconia |
| Grits | 24, 36, 40, 60, 80, 100, 120 |
| Dimension | 200 x 750 mm |
| Areas of application | New flooring / old floor refinishing |
| Suitable for | Hardwood and tropical wood |
| Benefits | <ul style="list-style-type: none"> – Long service life – Very durable backing – Extremely high abrasive performance |





ARTICLE NO. 041 XP

| | |
|----------------------|---|
| Backing | Heavy X-weight cotton/polyester fabric blend |
| Bonding | Resin over resin |
| Grain type | Ceramic |
| Grits | 36, 60, 80 |
| Dimension | 200 x 750 mm |
| Areas of application | New flooring / old floor refinishing |
| Suitable for | Hardwood |
| Benefits | <ul style="list-style-type: none"> – Optimized belt life – Very heavy duty applications – Self-sharpening effect |



ARTICLE NO. 543 X – 641 X

| | |
|----------------------|--|
| Backing | Heavy X-weight cotton fabric |
| Bonding | Resin over resin |
| Grain type | Aluminum oxide |
| Grits | 543 X: P 16, P 24, P 36 641 X: P 40, P 50, P 60, P 80, P 100, P 120 |
| Dimensions | 200 x 480 mm, 200 x 551 mm, 200 x 750 mm, 250 x 750 mm |
| Areas of application | New flooring / old floor refinishing |
| Suitable for | Hardwood and softwood |
| Benefits | <ul style="list-style-type: none"> – Durable cloth backing – Excellent price-performance ratio |



BELT SANDERS



ARTICLE NO. 943 X

| | |
|----------------------|---|
| Backing | Heavy X-weight cotton fabric |
| Bonding | Resin over resin |
| Grain type | Silicon carbide |
| Grits | P 12 |
| Dimensions | 200 x 551 mm, 200 x 750 mm |
| Areas of application | Refinishing |
| Suitable for | Hardwood, "barn red" floor paint, concrete and floor screed |
| Benefits | <ul style="list-style-type: none"> – Long service life – High abrasive performance – Sharp-edged and hard abrasive grain |



ARTICLE NO. 942 XP – 942 XYP

| | |
|----------------------|---|
| Backing | Heavy, durable X- or XY-weight polyester fabric |
| Bonding | Resin over resin |
| Grain type | Silicon carbide |
| Grits | 942 XYP: P 24, P 30, P 40 942 XP: P 50, P 60, P 80, P 100, P 120 |
| Dimensions | 200 x 551 mm, 200 x 750 mm |
| Areas of application | Refinishing |
| Suitable for | Hardwood, "barn red" floor paint, concrete and floor screed |
| Benefits | <ul style="list-style-type: none"> – Long service life – High abrasive performance – Sharp-edged and hard abrasive grain |



CYLINDER SANDERS



ARTICLE NO. 543 X – 732 E

| | |
|----------------------|---|
| Backing | 543 X: Heavy X-weight cotton fabric 732 E: Strong E-paper |
| Bonding | Resin over resin |
| Grain type | Aluminum oxide |
| Grits | 543 X: P 16 732 E: P 24, P 36, P 40, P 60, P 80, P 100, P 120 |
| Dimension | 200 x 50.000 mm |
| Areas of application | Pre-sanding, interim sanding and final finishing |
| Suitable for | All types of wood |
| Benefits | <ul style="list-style-type: none">– Long service life– Excellent price-performance ratio– Prevents quick clogging |



SINGLE DISC SANDERS



ARTICLE NO. 943 XX

| | |
|----------------------|---|
| Backing | Heavy X-weight cotton fabric, double-sided |
| Bonding | Resin over resin |
| Grain type | Silicon carbide |
| Grits | P 12, P 16 |
| Dimensions | D 375 mm x 40 mm D 400 mm x 25 mm D 430 mm x 25 mm |
| Areas of application | Refinishing |
| Suitable for | All types of wood, floor screed and spackle |
| Benefits | <ul style="list-style-type: none"> – Very durable backing – Sharp-edged abrasive grain – Long service life |



ARTICLE NO. 943 FF – 942 EE

| | |
|----------------------|---|
| Backing | 943 FF: Sturdy F-paper, double-sided 942 EE: Strong E-paper, double-sided |
| Bonding | Resin over resin |
| Grain type | Silicon carbide |
| Grits | 943 FF: P 16, P 24 942 EE: P 30, P 36, P 40, P 50, P 60, P 80, P 100, P 120 |
| Dimensions | D 375 mm x 40 mm D 400 mm x 25 mm D 430 mm x 25 mm |
| Areas of application | New flooring / old floor refinishing |
| Suitable for | All types of wood, floor screed and spackle |
| Benefits | <ul style="list-style-type: none"> – Sharp-edged abrasive grain – Long service life |





MESH DISCS

| | |
|----------------------|---|
| Backing | Nylon |
| Grain type | Silicon carbide |
| Grits | 60, 80, 100, 120, 150, 180 |
| Dimension | D 410 mm |
| Areas of application | Pre-sanding, interim sanding and final finishing |
| Suitable for | All types of wood |
| Benefits | <ul style="list-style-type: none"> – High tear resistance – Low dust generation – Long belt life |



MULTI-DISC SANDERS



ARTICLE NO. 341 XK

| | |
|----------------------|--|
| Backing | Heavy X-weight cotton fabric |
| Fastening | Velcro |
| Bonding | Resin over resin |
| Grain type | Zirconia |
| Grits | 24, 36, 40, 60, 80, 100, 120 |
| Dimension | D 150 mm |
| Areas of application | Pre-sanding, interim sanding and final finishing |
| Suitable for | Hardwood and softwood |
| Benefits | <ul style="list-style-type: none"> – Long service life – Extremely high abrasive performance |



ARTICLE NO. 543 XK – 732 EK

| | |
|----------------------|---|
| Backing | 543 XK: Heavy X-weight cotton fabric 732 EK: Strong E-paper |
| Fastening | Velcro |
| Bonding | Resin over resin |
| Grain type | Aluminum oxide |
| Grits | 543 XK: P 16 732 EK: P 24, P 36, P 40, P 50, P 60, P 80, P 100, P 120, P 150 |
| Dimensions | D 150 mm, 180 mm, 200 mm |
| Areas of application | Pre-sanding, interim sanding and final finishing |
| Suitable for | All types of wood |
| Benefits | <ul style="list-style-type: none"> – Long service life – Excellent price-performance ratio – Prevents quick clogging |





ARTICLE NO. 943 FK – 942 EK

| | |
|----------------------|---|
| Backing | 943 FK: Durable F-paper 942 EK: Strong E-paper |
| Fastening | Velcro |
| Bonding | Resin over resin |
| Grain type | Silicon carbide |
| Grits | 943 FK: P 16, P 24 942 EK: P 36, P 40, P 50, P 60, P 80, P 100, P 120 |
| Dimensions | D 150 mm x 8 mm D 178 mm x 22 mm |
| Areas of application | Pre-sanding, interim sanding and final finishing |
| Suitable for | All types of wood |
| Benefits | <ul style="list-style-type: none"> – Sharp-edged abrasive grain – Long service life |



EDGE SANDERS



ARTICLE NO. 543 X – 732 E

| | |
|----------------------|---|
| Backing | 543 X: Heavy X-weight cotton fabric 732 E: Strong E-paper |
| Bonding | Resin over resin |
| Grain type | Aluminum oxide |
| Grits | 543 X: P 16 732 E: P 24, P 36, P 40, P 60, P 80, P 100, P 120 |
| Dimensions | D 150 mm x 12 mm D 180 mm x 22 mm |
| Areas of application | Pre-sanding, interim sanding and final finishing |
| Suitable for | All types of wood |
| Benefits | <ul style="list-style-type: none"> – Long service life – Excellent price-performance ratio – Prevents quick clogging |



ARTICLE NO. 543 XK – 732 EK


| | |
|----------------------|---|
| Backing | 543 XK: Heavy X-weight cotton fabric 732 EK: Strong E-paper |
| Fastening | Velcro |
| Bonding | Resin over resin |
| Grain type | Aluminum oxide |
| Grits | 543 XK: P 16 732 EK: P 24, P 36, P 40, P 50, P 60, P 80, P 100, P 120 |
| Dimensions | D 150 mm, 180 mm, 200 mm |
| Areas of application | Pre-sanding, interim sanding and final finishing |
| Suitable for | All types of wood |
| Benefits | <ul style="list-style-type: none"> – Long service life – Excellent price-performance ratio – Prevents quick clogging |





ARTICLE NO. 041 XPK

| | |
|----------------------|---|
| Backing | Heavy X-weight cotton/polyester fabric blend |
| Fastening | Velcro |
| Bonding | Resin over resin |
| Grain type | Ceramic |
| Grits | 36, 60, 80 |
| Dimension | D 150 mm |
| Areas of application | Pre-sanding and interim sanding |
| Suitable for | Hardwood |
| Benefits | <ul style="list-style-type: none"> – Optimized belt life – Very heavy duty applications – Self-sharpening effect |

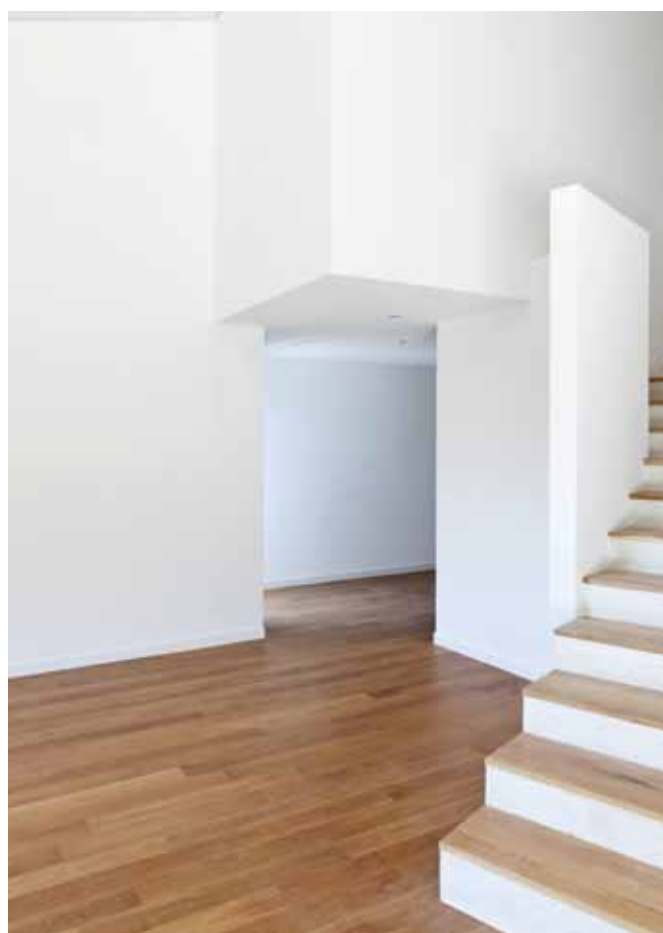

EDGE SANDERS



ARTICLE NO. 341 XK

| | |
|----------------------|--|
| Backing | Heavy X-weight cotton fabric |
| Fastening | Velcro |
| Bonding | Resin over resin |
| Grain type | Zirconia |
| Grits | 24, 36, 40, 60, 80, 100, 120 |
| Dimension | D 150 mm |
| Areas of application | Interim sanding and final finishing |
| Suitable for | Hardwood and softwood |
| Benefits | <ul style="list-style-type: none"> – Long service life – Extremely high abrasive performance |



ARTICLE NO. 943 FK – 942 EK

| | |
|----------------------|---|
| Backing | 943 FK: Durable F-paper 942 EK: Strong E-paper |
| Fastening | Velcro |
| Bonding | Resin over resin |
| Grain type | Silicon carbide |
| Grits | 943 FK: P 16, P 24 942 EK: P 36, P 40, P 50, P 60, P 80, P 100, P 120 |
| Dimensions | D 150 mm x 8 mm D 178 mm x 22 mm |
| Areas of application | Pre-sanding, interim sanding and final finishing |
| Suitable for | All types of wood |
| Benefits | <ul style="list-style-type: none"> – Sharp-edged abrasive grain – Long service life |



DELTA SANDERS



ARTICLE NO. 514 DK – 514C2K

| | |
|----------------------|---|
| Backing | 514 DK: Sturdy D-paper, high tear resistance 514 C2K: Flexible latex C-paper |
| Fastening | Velcro |
| Bonding | 514 DK: Resin over resin 514 C2K: Resin over resin with stearate coating |
| Grain type | Aluminum oxide |
| Grits | 514 DK: P 40, P 60, P 80, P 100, P 120 514 C2K: P 150 |
| Dimensions | 88 x 93 mm 88 x 95 mm 100 x 150 mm |
| Areas of application | Hard-to-access corners |
| Suitable for | All types of wood |
| Benefits | <ul style="list-style-type: none"> – Designed for all commercially available sanders – Optimized price-performance ratio – Easy to use |



ARTICLE NO. 732 EK

| | |
|----------------------|---|
| Backing | Strong E-paper |
| Fastening | Velcro |
| Bonding | Resin over resin |
| Grain type | Aluminum oxide |
| Grits | P 24, P 40, P 60, P 80, P 100, P 120 |
| Dimension | 83 mm x 83 mm |
| Areas of application | Hard-to-access corners |
| Suitable for | All types of wood |
| Benefits | <ul style="list-style-type: none"> – Designed for all commercially available sanders – Optimized price-performance ratio – Easy to use |



STARCKE®

Genuine STARCKE. Since 1829.

STARCKE GmbH & Co. KG
Markt 10
D-49324 Melle
Phone +49 (0) 54 22 966-0
Telefax +49 (0) 54 22 966-301
info@starcke.de
www.starcke.de